



Nero WP1201 Emergency IP65 & IK08 Rated Tricolour Weatherproof Batten

Installation Guide

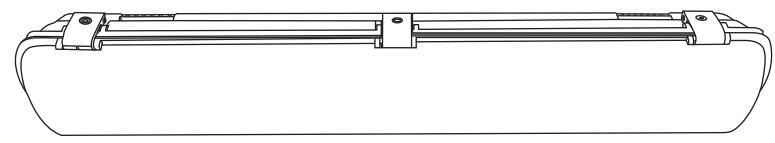

V2-20.07.2023 Product designs and technical data may be subject to change



Scan to explore Nero online

For warranty information please visit

trendlighting.com.au/warranty

Important Safety Information

Please read these installation instructions carefully before installing this luminaire.

- This product must be installed by a licensed electrician in accordance with AS/NZS 3000 and local regulations
- Isolate the mains power supply prior to installation
- Only adjust the CCT switch when luminaire is powered off
- Only reconnect mains power after installation is completed
- No part of the luminaire should be altered or modified
- This product is not user serviceable

Installation Notes



Emergency Sensor ** (Optional) Ingress Protection Impact Protection

Product Code	Dimensions (LxWxH)
Emergency WP1201-TRI-W-ND-EMB (Maintained)	1215 x 116 x 74 mm
Emergency WP1201-TRI-W-ND-EMB-MMS (Maintained w Sensor)	1215 x 116 x 74 mm
Emergency WP1201-TRI-W-ND-ENB (Non-Maintained)	1215 x 116 x 74 mm
Emergency WP1201-TRI-W-ND-ENB-MMS (Non-Maintained w Sensor)	1215 x 116 x 74 mm

* Emergency option is available. ** Detection area: 140 degree wide detective beam angle with 4-6 meters distance

Sensor Settings (For Optional Microwave Sensor)

Detection Area			Hold Time *			Daylight Sensor **			Stand-by Time ***		
1	2		3	4		5	6		7	8	
ON	ON	100%	ON	ON	5 sec	ON	ON	5 lux	ON	ON	0 sec
ON	-	75%	ON	-	1 min	ON	-	15 lux	ON	-	1 min
-	ON	50%	-	ON	5 min	-	ON	50 lux	-	ON	5 min
-	-	25%	-	-	10 min	-	-	Disable	-	-	+ ∞

* Refers to the time period the lamp remains at 100% illumination after no motion detected
 ** Sensor can be set to only allow the lamp to illuminate below a defined ambient brightness threshold. When set to Disable mode, the daylight sensor will switch on the lamp when motion is detected regardless of the ambient light level.
 *** Refers to the time period the lamp remains at low illumination after the Hold Time

