




## LED SPOT XTS26SM

26 Watts / 2690 Lumens / 90+ CRI

Surface mounted led spotlight with integral driver. Manufactured with a single 26W Japanese made LED with a high colour rendering index of 85 and high COB lumen outputs of 2615Lm (3000K), 2690Lm (4000K) and 2765Lm (5000K). Fully adjustable design with 360° rotation and 180° tilt. Anodized black heatsink provides effective thermal management ensuring high output and long lifespan.

### XTS26SM Dimensions

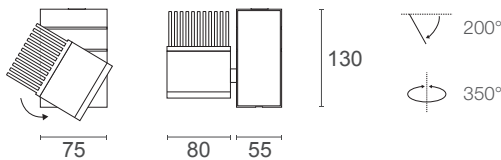

### XTS26SM Trim Colours



### XTS26SM Accessories

- DALI Track Connector
- Heatsink Sleeve
- Surface Mount

Input Voltage 240V

IP Rating IP20

System Power 26.4W

Tilt-Angle 200°

LED Power 25W

Rotation 350°


Lamp Type LED

Weight 900g

### XTS26SM Technical Specifications

	3000K	4000K	5000K
COB Lumen Output	2615 lm	2690 lm	2765 lm
Total Luminous Flux	1595 WB	1641 WB	1687 WB
Efficacy	62.0 lm/W Wide Beam		
Lifetime	50,000hrs (L70)		
Power Factor	> 0.95		
Input Voltage	100V - 240V AC 50/60 Hz		
Protection	Thermal and Short Circuit		
Dimming	DALI* Available on request		

### XTS26SM Order Code

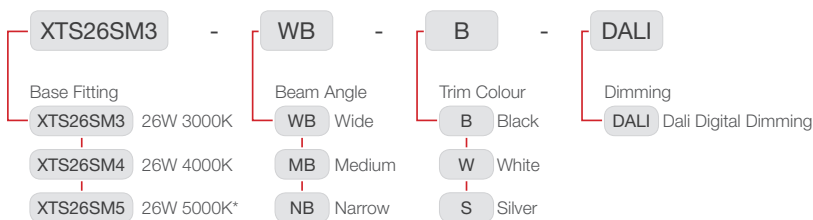

\* Special Order



**TREND**  
LIGHT BY SOLID STATE

Level 3, 290-292 Coward Street, Mascot, NSW, 2020  
Ph: (02) 9669 8888 Fax: (02) 9669 8899 Email: [sales@trendlighting.com.au](mailto:sales@trendlighting.com.au)