




MAXILED XMW40

40 Watts / 5560 Lumens / 90+ CRI




Square wide beam symmetrical LED downlight range featuring four individual COB LEDs in a square trim design. Available in 2700K, 3000K, 4000K and 5000K colour temperature options in 90+ CRI or 2700K, 3000K and 4000K VIVID options. Large passive heatsink provides effective thermal management ensuring high output and long lifespan. Supplied with remote driver.

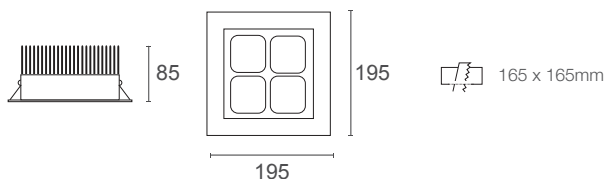

| | | | |
|--------------|-------|---------|-------------|
| System Power | 46.7W | Cut-Out | 165 x 165mm |
| LED Power | 42W | Weight | 1870g |
| IP Rating | IP20 | | |

| | 2700K | 3000K | 4000K | 5000K | VIVID | 2700K | 3000K | 4000K |
|---------------------|---------|---------|---------|---------|-------|---------|---------|---------|
| COB Lumen Output | 5200 lm | 5340 lm | 5560 lm | 5640 lm | VIVID | 4320 lm | 4480 lm | 4600 lm |
| Total Luminous Flux | 4178 lm | 4290 lm | 4467 lm | 4531 lm | VIVID | 3471 lm | 3599 lm | 3696 lm |

| | | | |
|---------------|----------------------------|--------------|---------------------------|
| Efficacy | 95.65 lm/W 4000K Wide Beam | Lifetime | 50,000hrs (L80) |
| Dimming | Optional: Dali | | |
| Input Voltage | 100V - 240V AC 50/60 Hz | Protection | Thermal and Short Circuit |
| | | Power Factor | > 0.95 |

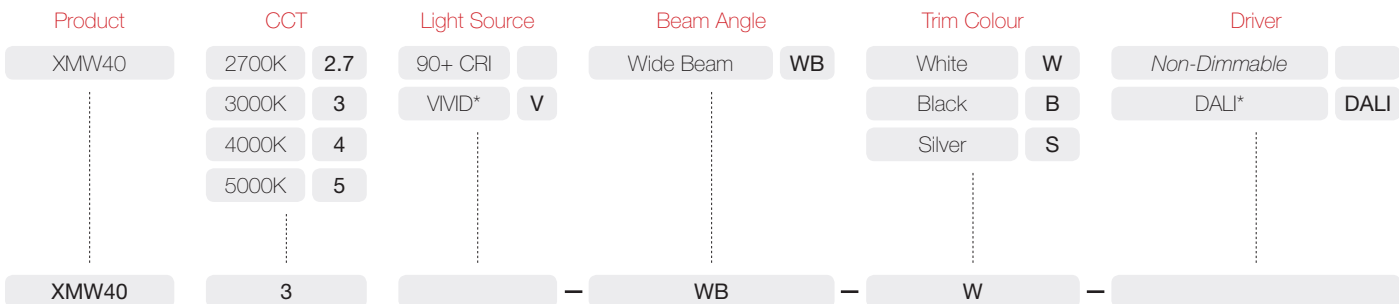

XMW403-WB-W

* Optional



TREND
LIGHT BY SOLID STATE

Level 3, 290-292 Coward Street, Mascot, NSW, 2020
Ph: (02) 9669 8888 Fax: (02) 9669 8899 Email: sales@trendlighting.com.au