


# MIDILED XDF25

25 Watts / 3170 Lumens / 90+ CRI



Recessed fixed 25W downlight featuring a single COB LED. Available in 2700K, 3000K, 4000K and 5000K colour temperature options in 90+ CRI or 2700K, 3000K and 4000K VIVID options. Sealed face with silicone gasket for added ingress protection and large passive heatsink for effective thermal management ensuring high output and long lifespan. Supplied with remote driver.

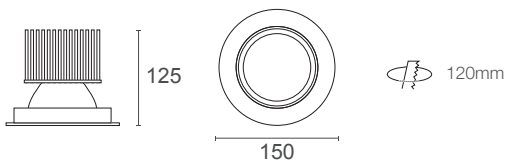

System Power	26.4W	Cut-Out	120mm
LED Power	25W	Weight	552g
IP Rating	IP65		

	2700K	3000K	4000K	5000K	VIVID	2700K	3000K	4000K
COB Lumen Output	2990 lm	3035 lm	3170 lm	3205 lm	VIVID	2570 lm	2650 lm	2725 lm
Total Luminous Flux	2156 lm	2189 lm	2286 lm	2311 lm	VIVID	1853 lm	1911 lm	1965 lm

Efficacy	86.59 lm/W 4000K Wide Beam	Lifetime	50,000hrs (L80)
Dimming	Leading + Trailing Edge	Optional: Dali	1-10v
Input Voltage	100V - 240V AC 50/60 Hz	Protection	Thermal and Short Circuit
		Power Factor	> 0.95

Product	CCT	Light Source	Beam Angle	Trim Colour	Insert Colour	Driver
XDF25	2700K 2.7	90+ CRI	Wide Beam WB	White W	Black Insert BT	Leading + Trailing
	3000K 3	VIVID* V	Medium Beam MB	Black B	White Insert* WT	DALI* DALI
	4000K 4		Narrow Beam NB	Silver S	Silver Insert* ST	1-10v* 1-10
	5000K 5				Gold Insert* GT	
XDF25	3		WB	W	BT	

XDF253-WB-W-BT

\* Optional



**TREND**  
LIGHT BY SOLID STATE

Level 3, 290-292 Coward Street, Mascot, NSW, 2020  
Ph: (02) 9669 8888 Fax: (02) 9669 8899 Email: sales@trendlighting.com.au