





PLATINUM P12J

Architectural design, remarkable efficiency and class leading light performance are the typical traits that make the Platinum P12J the ultimate downlight.

Dimensions

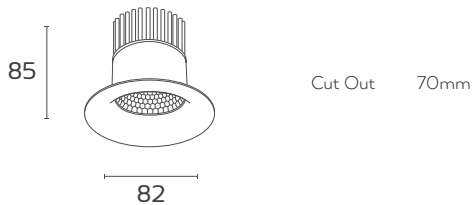

Photometry

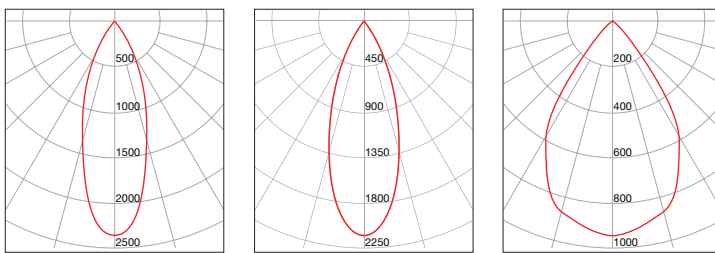

P12JW940.20D

P12JW940.38D

P12JW940.60D

Order Code

Example Code: P12JW . 930 . 20D (White Trim 3000K 20° Beam)

P12JW	White Trim	930	3000K	20D	20° Beam
P12JB	Black Trim	940	4000K	38D	38° Beam
				60D	60° Beam

1500+
COB LUMENS

94+
CRI

5 YEAR
WARRANTY

LED Characteristics

Luminous Flux	1213 lm (4000K, 60° Beam)
CCT	2700K 3000K 4000K
CRI	94+
Efficacy	≥ 101 lm/w
Colour Deviation	SDCM ≤ 3
Lifetime	> 60,000hrs (L80 B10)
Beam Angle	20° 38° 60°

Driver Characteristics

Power Consumption	11.9 W Typical
Nominal Voltage	240 V AC 50/60 Hz
Voltage Range	220 - 265 V AC
Power Factor	>0.93
Circuit Protection	OVP OCP OTP
Dimming	Leading & Trailing Edge (to 10%) DALI Optional

Environmental Characteristics

Ingress Protection	IP65 
Operating Temperature	-25° to 60°C

Warranty

5 Years