




SURFACE LED XSR25

25 Watts / 3170 Lumens / 90+ CRI




25 Watt surface mounted LED downlight available in 2700K, 3000K, 4000K and 5000K colour temperature options in 90+ CRI or 2700K, 3000K and 4000K VIVID options. Inner trim insert available in white, black, silver or gold colour options on request. Supplied with integral LED driver.



System Power	26.78W	Weight	1310g
LED Power	25W		
IP Rating	IP44		

	2700K	3000K	4000K	5000K	VIVID	2700K	3000K	4000K
COB Lumen Output	2990 lm	3035 lm	3170 lm	3205 lm	VIVID	2570 lm	2650 lm	2725 lm
Total Luminous Flux	2311 lm	2344 lm	2441 lm	2466 lm	VIVID	2007 lm	2066 lm	2120 lm

Efficacy	91.15 lm/W 4000K Wide Beam	Lifetime	50,000hrs (L80)
Dimming	Optional: Dali		
Input Voltage	100V - 240V AC 50/60 Hz	Protection	Thermal and Short Circuit
		Power Factor	> 0.95

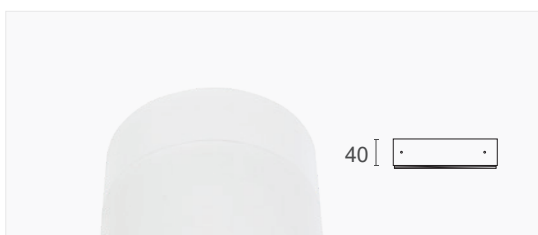

Optional concrete ceiling ring available to allow for side conduit entry.

Product	CCT	Light Source	Beam Angle	Trim Colour	Insert Colour	Driver
XSR25	2700K 2.7	90+ CRI	Wide Beam WB	White W	Black Insert BT	none
	3000K 3	VIVID* V	Medium Beam MB	Black B	White Insert* WT	DALI* DALI
	4000K 4		Narrow Beam NB	Silver S	Silver Insert* ST	
	5000K 5				Gold Insert* GT	
XSR25	3		WB	W	BT	

XSR253-WB-W-BT

* Optional



TREND
LIGHT BY SOLID STATE

Level 3, 290-292 Coward Street, Mascot, NSW, 2020
Ph: (02) 9669 8888 Fax: (02) 9669 8899 Email: sales@trendlighting.com.au