



Scan to explore  
XTW50 online

# Linear XTW50

35W Surface Mounted Wall Washer

Product Code	Colour Temperature	Colour Technology	Beam Angle	Trim Colour	Driver
XTW50	2.7 (2700K)	(CRI 90+ Standard)	VW (Very Wide)	W (White)	ND (Non-dimmable) DALI (DALI) 110V (1-10V)
	3 (3000K)			B (Black)	
	4 (4000K)				
	5 (5000K)				

Order Code **XTW504-VW-B-ND**



## Product Features

- Surface mounted adjustable high-powered LED linear known for its versatility in illuminating vertical features and surfaces
- Manufactured from extruded aluminium with powdercoat finish and opaque acrylic diffuser for smooth beam distribution
- Designed with adjustable mounting brackets, providing 355° tilt with flexible mounting options
- CRI 90+ available in 2700K, 3000K, 4000K and 5000K CCT options
- Supplied with integral control gear with flex & plug
- Custom lengths and driver options are available on request

## Product Attributes




To configure this linear light, please visit  
[trendlighting.com.au/product/linear-XTW50](http://trendlighting.com.au/product/linear-XTW50)

## Physical Characteristics

Trim Colour	White   Black
Dimensions (LxWxH)	1200 x 55 x 90 mm
Tilt Angle	355°
Weight	2.75 kg

## Dimensions (mm)

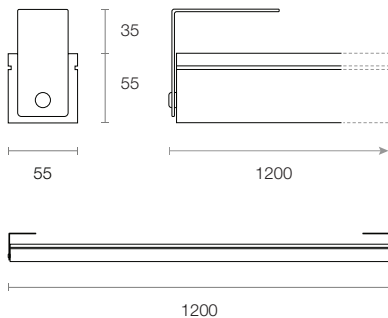

## Technical Characteristics

Based on XTW504-VW-B-ND

LED Power	35W
LED Type	COB
Lumen Output	4464 lm
Luminous Flux	2140 lm
Efficacy	56.32 lm/W
Colour Temperature	2700K   3000K   4000K   5000K
Colour Technology	CRI 90+
Colour Deviation	SDCM ≤ 3
Lifetime	50,000 hours (L70)
Beam Angle	Very Wide
System Power	38W Typical
Driver Model	Trend 150232 (Non-dim)
Input	220-240V AC 50/60 Hz
Output	24V DC 2.08A
Power Factor	>0.93
Protection	OVP, OTP, OCP, SCP, OPP
Dimming	Non-dimmable   DALI   1-10V

## General Characteristics

Category	Linears & Battens, Wall Washers
Family	Linear
Surface	Ceiling, Wall
Mounting	Surface Mounted
Ingress Protection	IP20



Scan to explore  
XTW50 online

# Linear XTW50

35W Surface Mounted Wall Washer

Product Code	Colour Temperature	Colour Technology	Beam Angle	Trim Colour	Driver
<b>XTW50</b>	2.7 (2700K)	(CRI 90+ Standard)	VW (Very Wide)	W (White)	ND (Non-dimmable) DALI (DALI) 110V (1-10V)
	3 (3000K)			B (Black)	
	4 (4000K)				
	5 (5000K)				

Order Code **XTW504-VW-B-ND**

To configure this linear light, please visit  
[trendlighting.com.au/product/linear-XTW50](http://trendlighting.com.au/product/linear-XTW50)

## Trim Colour



W  
White Trim



B  
Black Trim