



Scan to explore
XPM40 online

Maxipendant XPM40

40W Aluminium Dome Pendant

Product Code	Colour Temperature	Colour Technology	Beam Angle	Trim Colour	Driver
XPM40	3 (3000K)	(CRI 90+ Standard)	WB (Wide)	RW (Raw)	ND (Non-dimmable)
	4 (4000K)			CUS (Custom)	DALI (DALI)
	5 (5000K)				110V (1-10V)

Order Code **XPM404-WB-RW-ND**




To configure this pendant, please visit
trendlighting.com.au/product/maxipendant-XPM40

Physical Characteristics

Trim Colour	Raw Custom
Dimensions	Ø410 x 325 (H) mm
Weight	6250 g

Dimensions (mm)

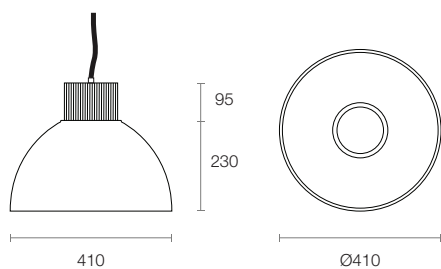

Product Features

- Suspended LED pendant characterised by its industrial appearance
- Equipped with spun aluminium reflector with floating frosted diffuser for uniform light distribution
- Large passive heatsink provides effective thermal management ensuring high output and long lifespan
- CRI 90+ available in 3000K, 4000K and 5000K CCT options
- Supplied with a remote driver

Product Attributes



Technical Characteristics

Based on XPM404-WB-RW-ND

LED Power	40W
LED Type	COB
Lumen Output	4220 lm
Luminous Flux	3672 lm
Efficacy	78.63 lm/W
Colour Temperature	3000K 4000K 5000K
Colour Technology	CRI 90+
Colour Deviation	SDCM ≤ 3
Lifetime	50,000 hours (L70)
Beam Angle	Wide

System Power	46.7W Typical
Driver Model	Trend 150030-300 (Non-dim)
Input	180-265V AC 50/60 Hz
Output	130-145V DC 300mA
Power Factor	>0.90
Protection	OVP, OTP, OCP, SCP, OPP
Dimming	Non-dimmable DALI 1-10V

General Characteristics

Category	Pendants
Family	Maxipendant
Surface	Ceiling
Mounting	Suspended
Ingress Protection	IP20