



Scan to explore  
XPM60 online

# Maxipendant XPM60

60W Aluminium Dome Pendant

Product Code	Colour Temperature	Colour Technology	Beam Angle	Trim Colour	Driver
XPM60	3 (3000K)	(CRI 90+ Standard)	WB (Wide)	RW (Raw)	ND (Non-dimmable)
	4 (4000K)			CUS (Custom)	DALI (DALI)
	5 (5000K)				110V (1-10V)

Order Code **XPM604-WB-RW-ND**




To configure this pendant, please visit  
[trendlighting.com.au/product/maxipendant-XPM60](http://trendlighting.com.au/product/maxipendant-XPM60)

## Physical Characteristics

Trim Colour	Raw   Custom
Dimensions	Ø410 x 325 (H) mm
Weight	6250 g

## Dimensions (mm)

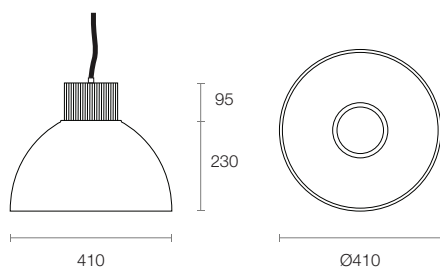

## Product Features

- Suspended LED pendant characterised by its industrial appearance
- Equipped with spun aluminium reflector with floating frosted diffuser for uniform light distribution
- Large passive heatsink provides effective thermal management ensuring high output and long lifespan
- CRI 90+ available in 3000K, 4000K and 5000K CCT options
- Supplied with a remote driver

## Product Attributes



## Technical Characteristics

Based on XPM604-WB-RW-ND

LED Power	60W
LED Type	COB
Lumen Output	6620 lm
Luminous Flux	5141 lm
Efficacy	79.71 lm/W
Colour Temperature	3000K   4000K   5000K
Colour Technology	CRI 90+
Colour Deviation	SDCM ≤ 3
Lifetime	50,000 hours (L70)
Beam Angle	Wide

System Power	64.5W Typical
Driver Model	Trend 150032-400 (Non-dim)
Input	180-265V AC 50/60 Hz
Output	130-165V DC 400mA
Power Factor	>0.90
Protection	OVP, OTP, OCP, SCP, OPP
Dimming	Non-dimmable   DALI   1-10V

## General Characteristics

Category	Pendants
Family	Maxipendant
Surface	Ceiling
Mounting	Suspended
Ingress Protection	IP20