

Scan to explore
XAL25 online

Midiled XAL25

25W IP65 & IK10 Rated Anti-Ligature Recessed Downlight

Product Code	Colour Temperature	Colour Technology	Beam Angle	Trim Colour	Driver
XAL25	2.7 (2700K)	(CRI 90+ Standard)	NB (Narrow)	W (White)	LT (Leading & Trailing Edge)
	3 (3000K)	V (CRI 93+ VIVID)	MB (Medium)		DALI (DALI)
	3.5 (3500K)	R (CRI 97+ Standard)	WB (Wide)		
	4 (4000K)				

Order Code **XAL254-WB-W-LT**




To configure this downlight, please visit
trendlighting.com.au/product/midiled-XAL25

Physical Characteristics

Trim Colour	White
Dimensions	Ø150 x 125 (H) mm
Spring Height	20 mm
Cutout	Circular 130 mm
Weight	505 g

Dimensions (mm)

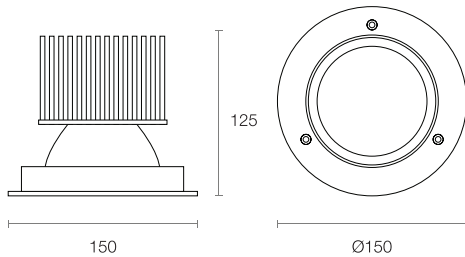

 Cutout Ø130 mm

Product Features

- Recessed LED downlight with 6 mm polycarbonate front lens and recessed security screws for tamper proof anti-ligature finish
- Manufactured with an aluminium body and powder coat finish
- Large pin fin heatsink for optimal thermal management
- CRI 90+ available in 2700K, 3000K, 3500K and 4000K CCT options; CRI 93+ VIVID and CRI 97+ available in 2700K, 3000K and 4000K CCT options
- Supplied with a remote driver

Product Attributes



Technical Characteristics

Based on XAL254-WB-W-LT

LED Power	25W
LED Type	COB
Lumen Output	2955 lm
Luminous Flux	2441 lm
Efficacy	91.08 lm/W
Colour Temperature	2700K 3000K 3500K 4000K
Colour Technology	CRI 90+ CRI 93+ VIVID CRI 97+
Colour Deviation	SDCM ≤ 2
Lifetime	50,000 hours (L80)
Beam Angle	Narrow Medium Wide
System Power	26.8W Typical
Driver Model	Trend 150020-700 (L&T)
Input	180-265V AC 50/60 Hz
Output	30-40V DC 700mA
Power Factor	>0.90
Protection	OVP, OTP, OCP, SCP, OPP
Dimming	Leading & Trailing Edge DALI

General Characteristics

Category	Downlights
Family	Midiled
Surface	Ceiling
Mounting	Recessed
Insulation Contact	Non-IC
Ingress Protection	IP65
Impact Resistance	IK10