



Scan to explore
XRW10 online

Midiled XRW10

10W Recessed Wall Washer Downlight

Product Code	Colour Temperature	Colour Technology	Beam Angle	Trim Colour	Driver
XRW10	3 (3000K)	(CRI 90+ Standard)	AS (Asymmetric)	W (White)	LT (Leading & Trailing Edge)
	4 (4000K)				DALI (DALI) 110V (1-10V)

Order Code **XRW104-AS-W-LT**




To configure this downlight, please visit
trendlighting.com.au/product/midiled-XRW10

Physical Characteristics

Trim Colour	White
Dimensions	Ø105 x 99 (H) mm
Spring Height	24 mm
Cutout	Circular 100 mm
Weight	890 g

Dimensions (mm)

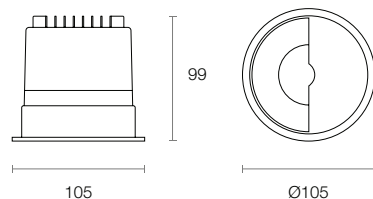

Product Features

- Recessed fixed LED downlight featuring an asymmetric beam distribution
- Specifically designed for illuminating and wall washing vertical surfaces
- CRI 90+ available in 3000K and 4000K CCT options
- Supplied with a remote driver

Product Attributes



Technical Characteristics

Based on XRW104-AS-W-LT

LED Power	10W
LED Type	COB
Lumen Output	1370 lm
Luminous Flux	536 lm
Efficacy	45.04 lm/W
Colour Temperature	3000K 4000K
Colour Technology	CRI 90+
Colour Deviation	SDCM ≤ 2
Lifetime	50,000 hours (L80 B10)
Beam Angle	Asymmetric
System Power	11.9W Typical
Driver Model	Trend 150218-300 (L&T)
Input	180-265V AC 50/60 Hz
Output	30-42V DC 300mA
Power Factor	>0.93
Protection	OVP, OTP, OCP, SCP, OPP
Dimming	Leading & Trailing Edge DALI 1-10V

General Characteristics

Category	Downlights, Wall Washers
Family	Midiled
Surface	Ceiling
Mounting	Recessed
Insulation Contact	Non-IC
Ingress Protection	IP20