



Scan to explore
XTF25 online

Track Spot XTF25

25W Zoomable Track Mounted Spotlight

Product Code	Colour Temperature	Colour Technology	Beam Angle	Trim Colour	Driver
XTF25	2.7 (2700K)	(CRI 90+ Standard)	ADJ (Adjustable)	W (White)	ND (Non-dimmable)
	3 (3000K)			B (Black)	DALI (DALI)
	4 (4000K)				

Order Code **XTF254-ADJ-B-ND**



Product Features

- Track mounted LED spotlight with zoomable lens, allowing for a 20° to 70° adjustment in beam angle for easy and accurate control with a smooth beam distribution
- Fully adjustable design with 350° horizontal rotation and 90° vertical tilt, allowing for directional adjustment in a variety of lighting applications
- CRI 90+ available in 2700K, 3000K and 4000K CCT options
- Supplied with a 3-circuit track adapter and an integral driver

Product Attributes




To configure this track light please visit

trendlighting.com.au/product/track-spot-XTF25

Physical Characteristics

Trim Colour	White Black
Tilt Angle	90°
Rotation	350°
Dimensions	Ø75 x 176 (H) mm
Weight	1060 g

Dimensions (mm)

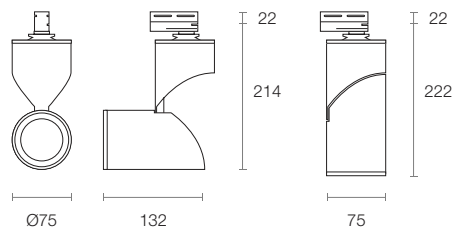

Technical Characteristics

Based on XTF254-ADJ-B-ND

LED Power	25W
LED Type	COB
Lumen Output	3077 lm
Luminous Flux	2060 lm
Efficacy	87.66 lm/W
Colour Temperature	2700K 3000K 4000K
Colour Technology	CRI 90+
Colour Deviation	SDCM ≤ 2
Lifetime	50,000 hours (L80)
Beam Angle	Adjustable
System Power	23.5 W Typical
Driver Model	Trend 150087-600 (Non-dim)
Input	220-240V AC 50/60 Hz
Output	25-42V DC 600mA
Power Factor	>0.93
Protection	OVP, OTP, OCP, SCP, OPP
Dimming	Non-dimmable DALI

General Characteristics

Category	Track Systems (Track Light)
Family	Track Spot
Surface	Ceiling
Mounting	Track Mounted
Ingress Protection	IP20



Scan to explore
XTF25 online

Track Spot XTF25

25W Zoomable Track Mounted Spotlight

Product Code	Colour Temperature	Colour Technology	Beam Angle	Trim Colour	Driver
XTF25	2.7 (2700K)	(CRI 90+ Standard)	ADJ (Adjustable)	W (White)	ND (Non-dimmable)
	3 (3000K)			B (Black)	DALI (DALI)
	4 (4000K)				

Order Code **XTF254-ADJ-B-ND**

To configure this track light please visit
trendlighting.com.au/product/track-spot-XTF25

Trim Colour




W
White Trim




B
Black Trim


Compatible 3 Circuit Track Systems




TRA3C
3 Circuit Track
Dimensions 33 x 35 mm
Max. Length 3000 mm
White | Black | Silver




TRA3C-DALI
3 Circuit DALI Track
Dimensions 33 x 35 mm
Max. Length 3000 mm
White | Black | Silver




TRA3CR
3 Circuit Recessed Track
Dimensions 56.2 x 35 mm
Max. Length 3000 mm
White | Black | Silver



TRA3CR-DALI
3 Circuit Recessed DALI Track
Dimensions 56.2 x 35 mm
Max. Length 3000 mm
White | Black | Silver



TRA3C-SA
3 Circuit Surface Mounted Monopoint
Dimensions Ø110 x 35 mm
White | Black



TRA3C-DALI-SA
3 Circuit Surface Mounted DALI Monopoint
Dimensions Ø143 x 35 mm
White | Black