



Scan to explore
XFW1260 online

Flexiled XFW1260

10W/m 12V DC IP65 Rated Flexible Weatherproof Strip

Product Code	Colour Temperature	Colour Technology	Length *	Driver
XFW1260	3 (3000K)	(CRI 80+ Standard)	1000 (1000 mm)	NA (No Driver)
	4 (4000K)		XXXX (Custom)	ND (Non-dimmable)
	5 (5000K)			DALI (DALI) 110V (1-10V)

Order Code **XFW12604-1000-NA**

* Custom lengths available



Product Features

- Flexible LED strip with a close pitch of 60 LEDs per metre in clear silicone tubing for IP65 Ingress protection
- Available in reels up to 5 metres with a cutting interval of 50 mm
- Supplied with adhesive backing for quick and easy installation
- CRI 80+ available in 3000K, 4000K and 5000K CCT options

To configure this LED strip, please visit
trendlighting.com.au/product/flexiled-XFW1260

Product Attributes




Physical Characteristics

Dimensions (LxWxH)	1000 x 15 x 7 mm
Max. Reel Length	5000 mm*

* Custom lengths available

Dimensions (mm)

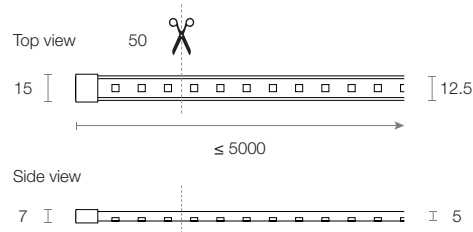

Technical Characteristics

Based on XFW12604-1000-NA

Input Voltage	12V DC
LED Power	10.2W per metre
LED Type	SMD
Lumen Output	850 lm
Colour Temperature	3000K 4000K 5000K
Colour Technology	CRI 80+
Colour Deviation	SDCM ≤ 3
Lifetime	50,000 hours
LED Pitch	60 LEDs per metre
LED Cutting Increment	50 mm (3 LEDs)
Backing	Adhesive Backing
Copper Content	2oz PCB

General Characteristics

Category	Strips & Extrusions
Family	Flexiled
Surface	Ceiling Floor Wall
Mounting	Surface Mounted
Ingress Protection	IP65