



Scan to explore
XTO20 online

Track Spot XTO20

20W Compact Track Spot

Product Code	Colour Temperature	Colour Technology	Beam Angle	Trim Colour	Accessories*	Driver
XTO20	2.7 (2700K)	(CRI 90+ Standard)	NB (Narrow)	W (White)	BD (Barn Door)	ND (Non-dimmable) DALI (DALI)
	3 (3000K)		MB (Medium)	B (Black)	CL (Cross Louvre)	
	4 (4000K)				ER (Eye Snoot) HL (Honeycomb Lens) SR (Snoot) WR (Wallwash Ring)	

Order Code **XTO204-MB-B-ND**

* Optional accessories



Product Features

- Track mounted compact high-powered LED spotlight distinctively known for its wide range of configurable accessories
- Powder coated body with anodised heatsink provides optimal thermal management ensuring high output and long lifespan
- Adjustable design with 350° rotation and 100° tilt angle
- CRI 90+ available in 3000K and 4000K CCT options
- Supplied with a 3-circuit track adapter and an integral driver

Product Attributes




To configure this track light please visit

trendlighting.com.au/product/track-spot-XTO20

Physical Characteristics

Trim Colour	White Black
Tilt Angle	100°
Rotation	350°
Dimensions	Ø85 x 151 (H) mm
Weight	966 g

Dimensions (mm)

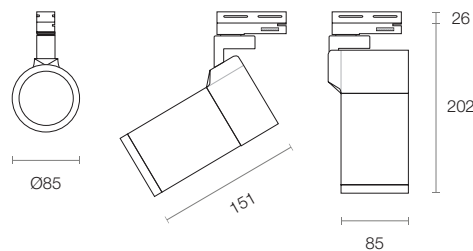

Technical Characteristics

Based on XTO204-MB-B-ND

LED Power	20W
LED Type	COB
Lumen Output	3132 lm
Luminous Flux	2527 lm
Efficacy	108.92 lm/W
Colour Temperature	2700K 3000K 4000K
Colour Technology	CRI 90+
Colour Deviation	SDCM ≤ 2
Lifetime	50,000 hours (L80)
Beam Angle	Narrow Medium
System Power	23.2W Typical
Driver Model	Trend 150417-500 (Non-dim)
Input	220-240V AC 50/60 Hz
Output	25-42V DC 500mA
Power Factor	>0.90
Protection	OVP, OTP, OCP, SCP, OPP
Dimming	Non-dimmable DALI

General Characteristics

Category	Track Systems (Track Light)
Family	Track Spot
Surface	Ceiling
Mounting	Track Mounted
Ingress Protection	IP20



Scan to explore
XTO20 online

Track Spot XTO20

20W Compact Track Spot

Product Code	Colour Temperature	Colour Technology	Beam Angle	Trim Colour	Accessories*	Driver
XTO20	2.7 (2700K)	(CRI 90+ Standard)	NB (Narrow)	W (White)	BD (Barn Door)	ND (Non-dimmable) DALI (DALI)
	3 (3000K)		MB (Medium)	B (Black)	CL (Cross Louvre)	
	4 (4000K)				ER (Eye Snoot) HL (Honeycomb Lens) SR (Snoot) WR (Wallwash Ring)	

Order Code **XTO204-MB-B-ND**

* Optional accessories

To configure this track light please visit
trendlighting.com.au/product/track-spot-XTO20

Trim Colour



W
White Trim



B
Black Trim


Accessories *



BD
Barn Door



CL
Cross Louvre



ER
Eye Snoot



HL
Honeycomb Lens




SR
Snoot




WR
Wallwash Ring


Compatible 3 Circuit Track Systems




TRA3C
3 Circuit Track
Dimensions 33 x 35 mm
Max. Length 3000 mm
White | Black | Silver




TRA3C-DALI
3 Circuit DALI Track
Dimensions 33 x 35 mm
Max. Length 3000 mm
White | Black | Silver




TRA3CR
3 Circuit Recessed Track
Dimensions 56.2 x 35 mm
Max. Length 3000 mm
White | Black | Silver



TRA3CR-DALI
3 Circuit Recessed DALI Track
Dimensions 56.2 x 35 mm
Max. Length 3000 mm
White | Black | Silver



TRA3C-SA
3 Circuit Surface Mounted Monopoint
Dimensions Ø110 x 35 mm
White | Black



TRA3C-DALI-SA
3 Circuit Surface Mounted DALI Monopoint
Dimensions Ø143 x 35 mm
White | Black