



DIFFUSED TROFFER ZDT

35 Watts / 4500 Lumens / 85+ CRI

Surface Mounted linear LED batten manufactured using Japanese based die's featuring 150lm/w technology. Powdercoated body with acrylic diffuser for smooth uniform light distribution. Internally mounted 4mm Terminal block for ease of installation.


Input Voltage	240V
System Power	37.6W
LED Power	35W

Lamp Type	LED
IP Rating	IP20
Weight	5300g

ZDT Technical Specifications

	ZDT444	ZDT445
COB Lumen Output	4500 lm	4710 lm
Total Luminous Flux	3609 lm	3819 lm
Efficacy	96.0 lm/W	
Lifetime	50,000hrs (L70)	
Power Factor	> 0.96	
Input Voltage	220V - 240V AC 50/60 Hz	
Protection	Thermal and Short Circuit	
Dimming	DALI* 1-10v* Available on request	


ZDT Dimensions

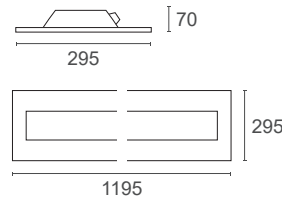

ZDT Trim Colours




Optional Plaster Kit

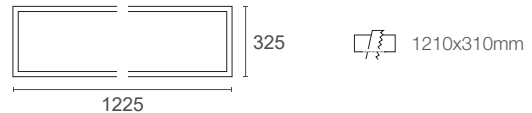

ZDT Order Code



ZDT Light Distribution

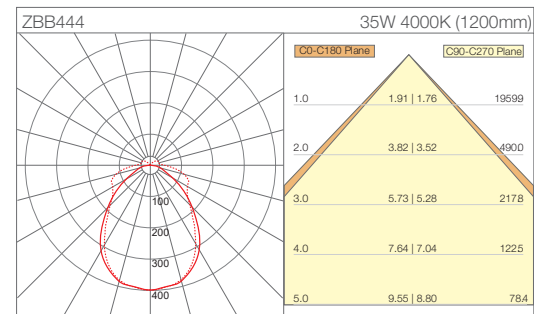

TREND
LIGHT BY SOLID STATE

288 Coward Street, Mascot, NSW, 2020
Ph: (02) 9669 8888 Fax: (02) 9669 8899 Email: sales@trendlighting.com.au