




HIGHBAY RFA150

150 Watts / 21,000 Lumens / 80+ CRI


Compact 150W LED highbay with a high light output of 21,000 lumens with a high CRI of 80+. Sealed body manufactured from die-cast aluminium with a durable powder coated finish provides an IP66 rating making it suitable for harsh applications. Specially developed optical design provides a uniform rectangular 60° x 90° beam distribution. Supplied with integral LED driver and 1.5 meter suspension cable as standard.

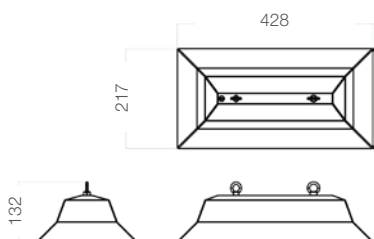

System Power	166W
LED Power	150W
IP Rating	IP66

Beam Angle	60x90°
Weight	4.2kg

	4000K	5000K		
COB Lumen Output	21,000 lm	21,840 lm		
Total Luminous Flux	16,883 lm	17,712 lm		
Efficacy	101 lm/W 4000K		Lifetime	50,000hrs (L80)
Dimming	Optional: Dali & 1-10v			
Input Voltage	100V - 240V AC 50/60 Hz		Protection	Thermal and Short Circuit
			Power Factor	> 0.95

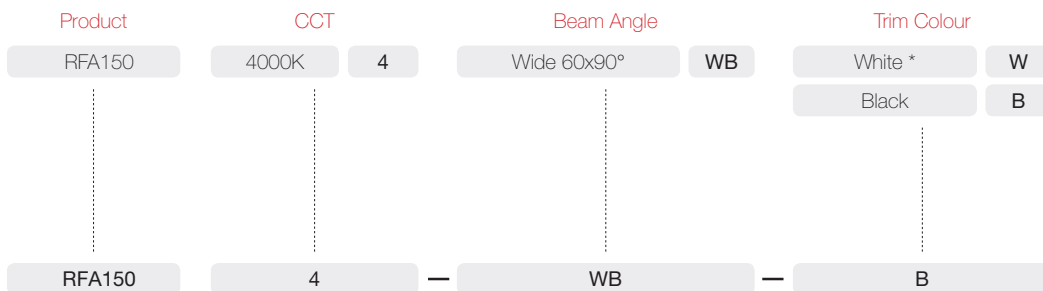

RFA1504-WB-B

* Optional



TREND
LIGHT BY SOLID STATE

288 Coward Street, Mascot, NSW, 2020
Ph: (02) 9669 8888 Fax: (02) 9669 8899 Email: sales@trendlighting.com.au