




# LOUVRED TROFFER ZLV44

35 Watts / 5170 Lumens / 85+ CRI



Recessed LED Louvred Troffer manufactured using SMD LEDs featuring 150lm/w technology. Powdercoated body with acrylic diffuser for smooth uniform light distribution. Suitable for mounting in metric T-Bar ceiling applications. Supplied with integral LED driver and internally mounted 4mm Terminal block for ease of installation. Emergency Maintained or Non-Maintained battery backup options available on request.

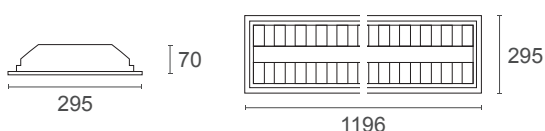

System Power 37.7W


LED Power 35W

IP Rating IP20

Weight 4100g

	3000K	4000K
COB Lumen Output	5050 lm	5170 lm
Total Luminous Flux	2909 lm	2929 lm
Efficacy	77.7 lm/W 4000K	

Lifetime	50,000hrs (L80)	Power Factor	> 0.95
Dimming	Optional: Dali 1-10v	Emergency Kit	Optional: Maintained or Non-Maintained Battery Backup
Input Voltage	100V - 240V AC 50/60 Hz	Protection	Thermal and Short Circuit
		Power Factor	> 0.95

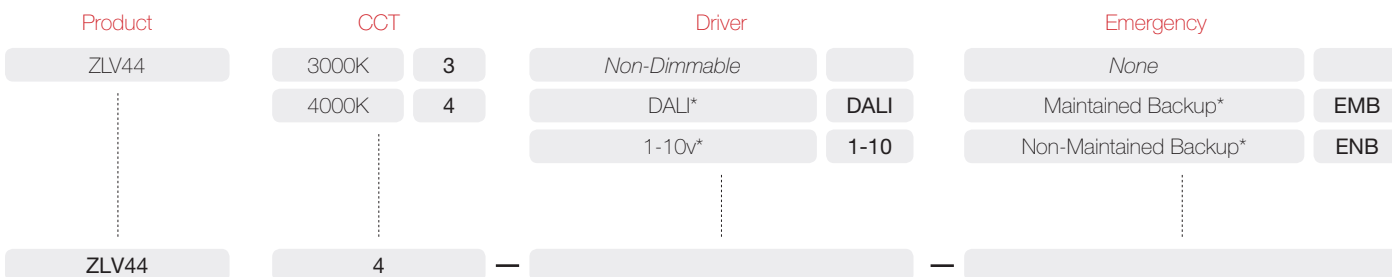

\* Optional