




MAXILED XDF55

55 Watts / 7350 Lumens / 90+ CRI



55W Recessed fixed LED downlight. Available in 2700K, 3000K, 4000K and 5000K colour temperature options in 90+ CRI or 2700K, 3000K and 4000K VIVID options. Sealed face with silicone gasket for increased ingress protection. Large pressure cast aluminium heatsink provides effective thermal management ensuring high output and long lifespan. Supplied with remote driver.

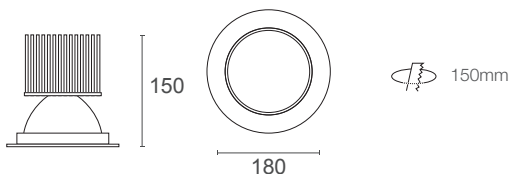

System Power	58.8W	Cut-Out	150mm
LED Power	55W	Weight	1000g
IP Rating	IP65		

	2700K	3000K	4000K	5000K	VIVID	2700K	3000K	4000K
COB Lumen Output	7050 lm	7200 lm	7350 lm	7500 lm	VIVID	5900 lm	6050 lm	6200 lm
Total Luminous Flux	5063 lm	5170 lm	5278 lm	5386 lm		4237 lm	4344 lm	4452 lm
Efficacy	89.76 lm/W 4000K Wide Beam			Lifetime	50,000hrs (L80)			
Dimming	Optional: Leading + Trailing Edge Dali							
Input Voltage	100V - 240V AC 50/60 Hz			Protection	Thermal and Short Circuit		Power Factor	> 0.95

Accessories



Product	CCT	Light Source	Beam Angle	Trim Colour	Insert Colour	Driver
XDF55	2700K 2.7	90+ CRI	Wide Beam WB	White W	Black Insert BT	none
	3000K 3	VIVID* V	Medium Beam MB	Black B	White Insert* WT	Leading + Trailing* L&T
	4000K 4			Silver S	Silver Insert* ST	DALI* DALI
	5000K 5				Gold Insert* GT	
XDF55	3		WB	W	BT	

XDF553-WB-W-BT

* Optional



TREND
LIGHT BY SOLID STATE

288 Coward Street, Mascot, NSW, 2020
Ph: (02) 9669 8888 Fax: (02) 9669 8899 Email: sales@trendlighting.com.au