


MIDILED XDF15

15 Watts / 1960 Lumens / 90+ CRI



Recessed fixed 15W downlight featuring a single COB LED. Available in 2700K, 3000K, 4000K and 5000K colour temperature options in 90+ CRI or 2700K, 3000K and 4000K VIVID options. Sealed face with silicone gasket for added ingress protection and large passive heatsink for effective thermal management ensuring high output and long lifespan. Inner trim insert supplied in white as standard or in black, silver or gold colour options on request. Supplied with remote LED driver.

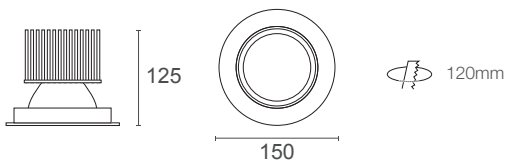

System Power	18.2W	Cut-Out	120mm
LED Power	15W	Weight	552g
IP Rating	IP65		

	2700K	3000K	4000K	5000K	VIVID	2700K	3000K	4000K
COB Lumen Output	1850 lm	1895 lm	1960 lm	1985 lm	VIVID	1585 lm	1635 lm	1670 lm
Total Luminous Flux	1530 lm	1570 lm	1635 lm	1660 lm		1270 lm	1315 lm	1355 lm
Efficacy	89.84 lm/W 4000K Wide Beam			Lifetime	50,000hrs (L80)			
Dimming	Optional: Leading + Trailing Edge Dali 1-10v							
Input Voltage	100V - 240V AC 50/60 Hz			Protection	Thermal and Short Circuit		Power Factor	> 0.95

Accessories



Product	CCT	Light Source	Beam Angle	Trim Colour	Insert Colour	Driver
XDF15	2700K 2.7	90+ CRI	Wide Beam WB	White W	Black Insert BT	Leading + Trailing* L&T
	3000K 3	VMD* V	Medium Beam MB	Black B	White Insert* WT	DALI* DALI
	4000K 4		Narrow Beam NB	Silver S	Silver Insert* ST	1-10v* 1-10
	5000K 5				Gold Insert* GT	
XDF15	3		WB	W	WT	

XDF153-WB-W-WT

* Optional



TREND
LIGHT BY SOLID STATE

288 Coward Street, Mascot, NSW, 2020
Ph: (02) 9669 8888 Fax: (02) 9669 8899 Email: sales@trendlighting.com.au