




MIDILED XDM25

25 Watts / 3170 Lumens / 90+ CRI



Recessed adjustable 25W downlight featuring a single COB LED. Available in 2700K, 3000K, 4000K and 5000K colour temperature options in 90+ CRI or 2700K, 3000K and 4000K VIVID options. Large passive heatsink for effective thermal management ensuring high output and long lifespan. Inner trim insert supplied in white as standard or in black, silver or gold colour options on request. Supplied with remote LED driver.

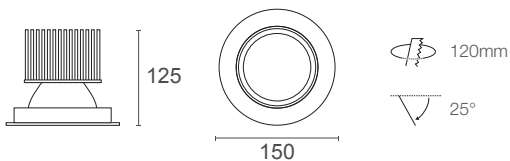

System Power	26.8W	Cut-Out	120mm
LED Power	25W	Tilt-Angle	25°
IP Rating	IP20	Weight	505g

	2700K	3000K	4000K	5000K	VIVID	2700K	3000K	4000K
COB Lumen Output	2990 lm	3035 lm	3170 lm	3205 lm	VIVID	2570 lm	2650 lm	2725 lm
Total Luminous Flux	2311 lm	2344 lm	2441 lm	2466 lm		2007 lm	2066 lm	2120 lm

Efficacy	91.08 lm/W	4000K Wide Beam	Lifetime	50,000hrs (L80)
Dimming	Optional: Leading + Trailing Edge Dali 1-10v			
Input Voltage	100V - 240V AC 50/60 Hz		Protection	Thermal and Short Circuit
			Power Factor	> 0.95

Accessories



Product	CCT	Light Source	Beam Angle	Trim Colour	Insert Colour	Driver				
XDM25	2700K	2.7	90+ CRI	Wide Beam	WB	White	W	Black Insert	BT	non dimmable
	3000K	3	VIVID*	Medium Beam	MB	Black	B	White Insert*	WT	Leading + Trailing*
	4000K	4		Narrow Beam	NB	Silver	S	Silver Insert*	ST	DALI*
	5000K	5				Gold Insert*	GT			
XDM25	3			WB		W		WT		

XDM253-WB-W-WT

* Optional



TREND
LIGHT BY SOLID STATE

288 Coward Street, Mascot, NSW, 2020
Ph: (02) 9669 8888 Fax: (02) 9669 8899 Email: sales@trendlighting.com.au