




# MIDILED XDM30

30 Watts / 3900 Lumens / 90+ CRI



Recessed adjustable 30W downlight featuring a single COB LED. Available in 2700K, 3000K, 4000K and 5000K colour temperature options in 90+ CRI or 2700K, 3000K and 4000K VIVID options. Large passive heatsink for effective thermal management ensuring high output and long lifespan. Supplied with remote driver.

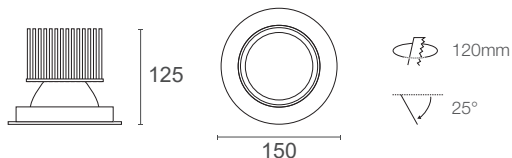

System Power	31.6W	Cut-Out	120mm
LED Power	30W	Tilt-Angle	25°
IP Rating	IP20	Weight	515g

	2700K	3000K	4000K	5000K	VIVID	2700K	3000K	4000K
COB Lumen Output	3660 lm	3780 lm	3900 lm	3960 lm	VIVID	3120 lm	3180 lm	3240 lm
Total Luminous Flux	2629 lm	2715 lm	2801 lm	2844 lm		2241 lm	2284 lm	2327 lm
Efficacy	88.64 lm/W 4000K Medium Beam			Lifetime	50,000hrs (L80)			
Dimming	Leading + Trailing Edge			Optional: Dali 1-10v				
Input Voltage	100V - 240V AC 50/60 Hz			Protection	Thermal and Short Circuit		Power Factor	> 0.95

### Accessories



Product	CCT		Light Source		Beam Angle		Trim Colour		Insert Colour		Driver	
XDM30	2700K	2.7	90+ CRI		Medium Beam	MB	White	W	Black Insert	BT	non dimmable	
	3000K	3	VIVID*	V			Black	B	White Insert*	WT	Leading + Trailing DIM	
	4000K	4					Silver	S	Silver Insert*	ST	DALI* DALI	
	5000K	5							Gold Insert*	GT		
XDM30	3				MB		W		BT			

XDM303-MB-W-BT

\* Optional



**TREND**  
LIGHT BY SOLID STATE

288 Coward Street, Mascot, NSW, 2020  
Ph: (02) 9669 8888 Fax: (02) 9669 8899 Email: sales@trendlighting.com.au