




MIDILED XRD25

24 Watts / 2135 Lumens / 90+ CRI



Recessed LED downlight with adjustable 'pull-out' gimble design. Featuring a single 24W LED with a high CRI of 90+ and high COB lumen outputs of 1680Lm (3000K) and 1750Lm (4000K). Fully adjustable design with 350° rotation and 90° tilt allowing for directional adjustment in a variety of lighting applications. Optional coloured trim inserts enable seamless integration with any design aesthetic. Supplied with remote driver.

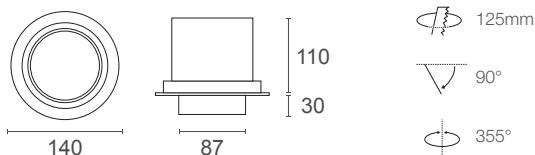

System Power	25.6W	Cut-Out	125mm
LED Power	24W	Tilt-Angle	90°
IP Rating	IP20	Rotation	355°
		Weight	850g

	3000K	4000K
COB Lumen Output	2050 lm	2135 lm
Total Luminous Flux	1680 lm	1750 lm

Efficacy	68.35 lm/W 4000K	Lifetime	50,000hrs (L80)
Dimming	Optional: Leading + Trailing Edge		
Input Voltage	100V - 240V AC 50/60 Hz	Protection	Thermal and Short Circuit
		Power Factor	> 0.95

Optional Accessories



Product	CCT	Beam Angle	Trim Colour	Optional Accessories
XRD25	3000K 3 4000K 4	Medium Beam MB	White W Black B	Black Insert BT White Insert* WT Silver Insert* ST Gold Insert* GT Honeycomb Lens* HL Soft Outline Lens* OL Linear Spreader Lens* LL
XRD25	3	MB	W	BT
XRD253-MB-W-BT				

* Optional



TREND
LIGHT BY SOLID STATE

288 Coward Street, Mascot, NSW, 2020
Ph: (02) 9669 8888 Fax: (02) 9669 8899 Email: sales@trendlighting.com.au