





PLATINUM P12G

Architectural design, remarkable efficiency and class leading light performance are the typical traits that make the Platinum P12G the ultimate downlight.

Dimensions

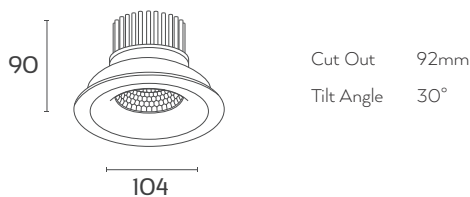

Photometry

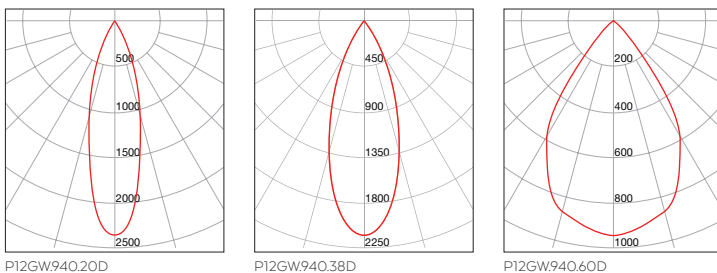

Order Code

Example Code: **P12GW.930.20D** (White Trim 3000K 20° Beam)

P12GW	White Trim	927	2700K	20D	20° Beam
P12GB	Black Trim	930	3000K	38D	38° Beam
		935	3500K	60D	60° Beam
		940	4000K		

1500+
COB LUMENS

94+
CRI

5 YEAR
WARRANTY

LED Characteristics

Luminous Flux	1213 lm (4000K, 60° Beam)
CCT	2700K 3000K 3500K 4000K
CRI	94+
Efficacy	≥ 101 lm/w
Colour Deviation	SDCM ≤ 3
Lifetime	> 60,000hrs (L80 B10)
Beam Angle	20° 38° 60°

Driver Characteristics

Power Consumption	11.9 W Typical
Nominal Voltage	240 V AC 50/60 Hz
Voltage Range	220 - 265 V AC
Power Factor	>0.93
Circuit Protection	OVP OCP OTP
Dimming	Leading & Trailing Edge (to 10%) DALI Optional

Environmental Characteristics

Ingress Protection	IP20
Operating Temperature	-25° to 60°C

Warranty

5 Years