




# SURFACE LED XSR10

10 Watts / 1390 Lumens / 90+ CRI




10 Watt Surface Mounted LED downlight available in 2700K, 3000K, 4000K and 5000K colour temperature options in 90+ CRI or 2700K, 3000K and 4000K VIVID options. Supplied with integral LED driver.



System Power	11.7W	Weight	765g
LED Power	10.5W		
IP Rating	IP20		

	2700K	3000K	4000K	5000K	VIVID	2700K	3000K	4000K
COB Lumen Output	1300 lm	1335 lm	1390 lm	1410 lm	VIVID	1080 lm	1120 lm	1150 lm
Total Luminous Flux	1025 lm	1052 lm	1096 lm	1112 lm		851 lm	883 lm	906 lm
Efficacy	93.68 lm/W 4000K Wide Beam			Lifetime	50,000hrs (L80)			
Dimming	Optional: Dali 1-10v							
Input Voltage	100V - 240V AC 50/60 Hz			Protection	Thermal and Short Circuit		Power Factor	> 0.95

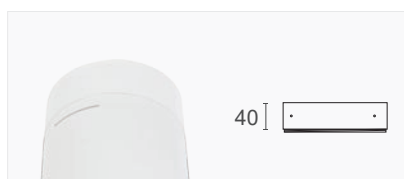

Optional concrete ceiling ring available to allow for side conduit entry.

Product	CCT	Light Source	Beam Angle	Trim Colour	Insert Colour	Driver						
XSR10	2700K	2.7	90+ CRI	Wide Beam	WB	White	W	White Insert	WT	none		
	3000K	3	VMD*	V	Medium Beam	MB	Black	B	Black Insert*	BT	DALI*	DALI
	4000K	4		Narrow Beam	NB	Silver	S	Silver Insert*	ST	1-10v*	1-10	
	5000K	5						Gold Insert*	GT			
XSR10	3		WB	W	WT							

XSR103-WB-W-BT

\* Optional



**TREND**  
LIGHT BY SOLID STATE

288 Coward Street, Mascot, NSW, 2020  
Ph: (02) 9669 8888 Fax: (02) 9669 8899 Email: sales@trendlighting.com.au