



Linear ZDWR36

36W IP65 & IK10 Rated Linear Light with Integrated Reflector

Scan to explore
ZDWR36 online

Product Code	Colour Temperature	Colour Technology	Beam Angle	Trim Colour	Driver
ZDWR36	3 (3000K) 4 (4000K)	(CRI 90+ Standard)	WB (Wide Beam)	W (White) B (Black)	ND (Non-dimmable) DALI DALI

Order Code **ZDWR364-WB-B-ND**




To configure this linear light, please visit
trendlighting.com.au/product/linear-ZDWR36

Physical Characteristics

Trim Colour	White Black
Dimensions (LxWxH)	1415 x 65 x 75 mm

Dimensions (mm)

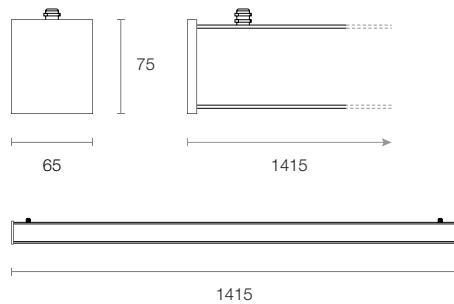

Product Features

- Modular LED linear profile with integrated reflector with clear diffuser for maximum visual comfort
- IP65 & IK10 rated suitable for high-humidity environments
- Flexible mounting options available: suspended, ceiling-mounted, or wall-mounted
- Comes in fixed lengths, but can be linked into a continuous run using a 180° connector and cable, or an IP65 cable
- Also available in 45W ([ZDWR45](#))
- CRI 90+ available in 3000K and 4000K options

Product Attributes



Technical Characteristics

Based on ZDWR364-WB-B-ND

LED Type	SMD
Luminous Flux	3816 lm
Efficacy	106 lm/W
Colour Temperature	3000K 4000K
Colour Technology	CRI 90+
Colour Deviation	SDCM ≤ 3
Lifetime	50,000 hours (L70)
Beam Angle	Wide
System Power	36W Typical
Driver Model	Trend DR-ZDWR36 (Non-dim)
Input	220-240V AC 50/60 Hz
Power Factor	>0.90
Protection	OVP, OTP, OCP, SCP, OPP
Dimming	Non-dimmable DALI

General Characteristics

Category	Linears & Battens
Family	Linear
Surface	Ceiling Wall
Mounting	Surface Mounted Suspended
Ingress Protection	IP65
Impact Resistance	IK10



Linear ZDWR36

36W IP65 & IK10 Rated Linear Light with Integrated Reflector

Product Code	Colour Temperature	Colour Technology	Beam Angle	Trim Colour	Driver
ZDWR36	3 (3000K) 4 (4000K)	(CRI 90+ Standard)	WB (Wide Beam)	W (White) B (Black)	ND (Non-dimmable) DALI DALI

Order Code **ZDWR364-WB-B-ND**

To configure this linear light, please visit
trendlighting.com.au/product/linear-ZDWR36

Trim Colour



W
White Trim



B
Black Trim

Accessories




Surface Mount Kit



Wall Mount Kit



Suspension Kit

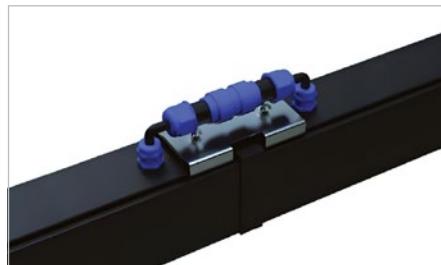

180° Connector & Cable



IP65 AC Cable