



Scan to explore  
XLC25 online

# Maxiled XLC25

25W Recessed Downlight

Product Code	Colour Temperature	Colour Technology	Beam Angle	Trim Colour	Driver
XLC25	3 (3000K)	(CRI 90+ Standard)	MB (Medium)	W (White)	LT (Leading & Trailing Edge)
	4 (4000K)				DALI (DALI)

Order Code **XLC254-MB-W-LT**



## Product Features

- Recessed LED downlight with dual reflector design for visual comfort
- Manufactured with an aluminum body and finish
- A variety of sizes, power and trim options available (XLC10, XLC35, XLC25 and XLC35)
- CRI 90+ available in 3000K and 4000K CCT options
- Supplied with a remote driver

## Product Attributes




To configure this downlight, please visit  
[trendlighting.com.au/product/maxiled-XLC25](http://trendlighting.com.au/product/maxiled-XLC25)

## Physical Characteristics

Trim Colour	White
Dimensions	Ø190 x 130 (H) mm
Spring Height	25 mm
Cutout	Circular 165 - 180 mm
Weight	985 g

## Dimensions (mm)

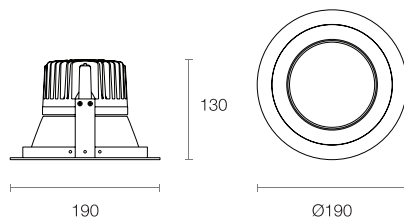

## Technical Characteristics

Based on XLC254-MB-W-LT

LED Power	25W
LED Type	COB
Lumen Output	3375 lm
Luminous Flux	2481 lm
Efficacy	93.98 lm/W
Colour Temperature	3000K   4000K
Colour Technology	CRI 90+
Colour Deviation	SDCM ≤ 3
Lifetime	50,000 hours (L80)
Beam Angle	Medium
System Power	26.4W Typical
Driver Model	Trend 150020-700 (L&T)
Input	180-265V AC 50/60 Hz
Output	30-40V DC 700mA
Power Factor	>0.90
Protection	OVP, OTP, OCP, SCP, OPP
Dimming	Leading & Trailing Edge   DALI

## General Characteristics

Category	Downlights
Family	Maxiled
Surface	Ceiling
Mounting	Recessed
Insulation Contact	Non-IC
Ingress Protection	IP20