



Scan to explore
XDF10 online

Miniled XDF10

10W IP65 Rated Recessed Downlight

| Product Code | Colour Temperature | Colour Technology | Beam Angle | Trim Colour | Insert Colour | Driver |
|--------------|--------------------|----------------------|-------------|-------------|---------------|------------------------------|
| XDF10 | 2.7 (2700K) | (CRI 90+ Standard) | NB (Narrow) | W (White) | WI (White) | LT (Leading & Trailing Edge) |
| | 3 (3000K) | V (CRI 93+ VIVID) | MB (Medium) | B (Black) | BI (Black) | DALI (DALI) |
| | 3.5 (3500K) | R (CRI 97+ Standard) | WB (Wide) | | | 110V (1-10V) |
| | 4 (4000K) | | | | | |

Order Code **XDF104-WB-W-WI-LT**



To configure this downlight, please visit
trendlighting.com.au/product/miniled-XDF10

Product Features

- Recessed IP65 rated LED downlight with exceptional light output and quality
- Manufactured with an aluminium body and powder coat finish
- A wide choice of power options and sizes available ([XDF15](#), [XDF25](#), [XDF35](#) and [XDF55](#))
- CRI 90+ available in 2700K, 3000K, 3500K and 4000K CCT options; CRI 93+ VIVID and CRI 97+ available in 2700K, 3000K and 4000K CCT options
- Supplied with a remote driver


Product Attributes



Physical Characteristics

| | |
|---------------|-------------------|
| Trim Colour | White Black |
| Insert Colour | White Black |
| Dimensions | Ø110 x 100 (H) mm |
| Spring Height | 15 mm |
| Cutout | Circular 76-92 mm |
| Weight | 280 g |

Dimensions (mm)

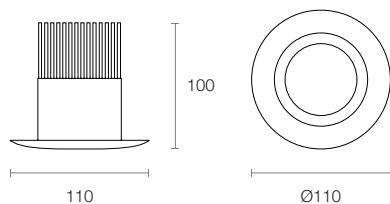

 Cutout Ø76-92 mm

Technical Characteristics

Based on XDF104-WB-W-WI-LT

| | |
|--------------------|-----------------------------------|
| LED Power | 10W |
| LED Type | COB |
| Lumen Output | 1450 lm |
| Luminous Flux | 1142 lm |
| Efficacy | 97.61 lm/W |
| Colour Temperature | 2700K 3000K 3500K 4000K |
| Colour Technology | CRI 90+ CRI 93+ VIVID CRI 97+ |
| Colour Deviation | SDCM ≤ 3 |
| Lifetime | 50,000 hours (L80) |
| Beam Angle | Narrow Medium Wide |

| | |
|--------------|--|
| System Power | 11.7W Typical |
| Driver Model | Trend 150218-300 (L&T) |
| Input | 180-265V AC 50/60 Hz |
| Output | 30-42V DC 300mA |
| Power Factor | >0.93 |
| Protection | OVP, OTP, OCP, SCP, OPP |
| Dimming | Leading & Trailing Edge DALI 1-10V |

General Characteristics

| | |
|--------------------|------------|
| Category | Downlights |
| Family | Miniled |
| Surface | Ceiling |
| Mounting | Recessed |
| Insulation Contact | CA90 |
| Ingress Protection | IP65 |



Scan to explore
XDF10 online

Miniled XDF10

10W IP65 Rated Recessed Downlight

| Product Code | Colour Temperature | Colour Technology | Beam Angle | Trim Colour | Insert Colour | Driver |
|--------------|--------------------|----------------------|-------------|-------------|---------------|------------------------------|
| XDF10 | 2.7 (2700K) | (CRI 90+ Standard) | NB (Narrow) | W (White) | WI (White) | LT (Leading & Trailing Edge) |
| | 3 (3000K) | V (CRI 93+ VIVID) | MB (Medium) | B (Black) | BI (Black) | DALI (DALI) |
| | 3.5 (3500K) | R (CRI 97+ Standard) | WB (Wide) | | | 110V (1-10V) |
| | 4 (4000K) | | | | | |

Order Code **XDF104-WB-W-WI-LT**

To configure this downlight, please visit
trendlighting.com.au/product/miniled-XDF10

Trim Colour



W
White Trim



B
Black Trim