



Scan to explore
ZAR30 online


Troffer ZAR30

26W Recessed Troffer with Air Return

Product Code	Colour Temperature	Colour Technology	Beam Angle	Trim Colour	Driver	Emergency Kits *
ZAR30	2.7 (2700K)	(CRI 90+ Standard)	VW (Very Wide)	W (White)	ND (Non-dimmable) DALI (DALI)	EMB (Maintained Backup) ENB (Non-maintained Backup)
	3 (3000K)					
	3.5 (3500K)					
	4 (4000K)					
	5 (5000K)					

Order Code **ZAR304-VW-W-ND**

* Optional emergency kits

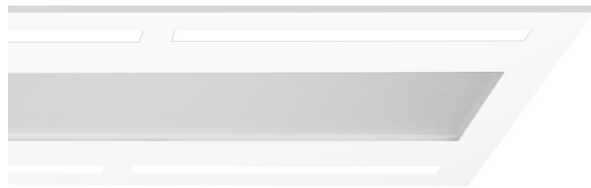

Product Features

- Recessed LED troffer designed with side slots to facilitate return air of air conditioning systems
- Powder coated aluminium housing with low glare, high transparency microprismatic diffuser for smooth uniform light distribution
- Suitable for mounting in metric T-Bar ceiling applications
- CRI 90+ available in 2700K, 3000K, 3500K, 4000K and 5000K CCT options
- Emergency maintained or non-maintained battery backup options available on request
- Supplied with an integral flicker free driver

Product Attributes




To configure this troffer, please visit
trendlighting.com.au/product/troffer-ZAR30

Physical Characteristics

Trim Colour	White
Dimensions (LxWxH)	1195 x 295 x 70 mm
Weight	4.38 kg

Dimensions (mm)

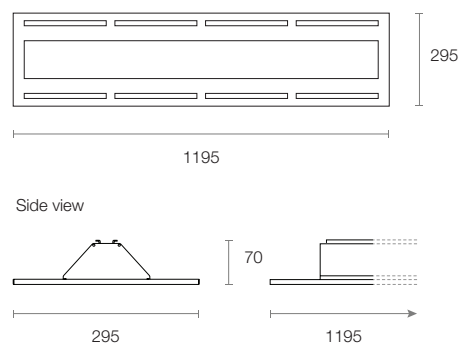

Technical Characteristics

Based on ZAR304-VW-W-ND

LED Power	26W
LED Type	SMD
Lumen Output	4464 lm
Luminous Flux	3036 lm
Efficacy	105.78 lm/W
Colour Temperature	2700K 3000K 3500K 4000K 5000K
Colour Technology	CRI 90+
Colour Deviation	SDCM ≤ 3
Lifetime	50,000 hours (L80 B10)
Beam Angle	Very Wide
System Power	28.7W Typical
Driver Model	Trend 150232 (Non-dim)
Input	220-240V AC 50/60 Hz
Output	24V DC 2.08A
Power Factor	>0.93
Protection	OVP, OTP, OCP, SCP, OPP
Dimming	Non-dimmable DALI

General Characteristics

Category	Panels & Troffers
Family	Troffer
Surface	Ceiling
Mounting	Recessed
Insulation Contact	Non-IC
Ingress Protection	IP20



Scan to explore
ZAR30 online

Troffer ZAR30

26W Recessed Troffer with Air Return

Product Code	Colour Temperature	Colour Technology	Beam Angle	Trim Colour	Driver	Emergency Kits *
ZAR30	2.7 (2700K)	(CRI 90+ Standard)	VW (Very Wide)	W (White)	ND (Non-dimmable) DALI (DALI)	EMB (Maintained Backup)
	3 (3000K)					ENB (Non-maintained Backup)
	3.5 (3500K)					
	4 (4000K)					
	5 (5000K)					

Order Code **ZAR304-VW-W-ND**

* Optional emergency kits

To configure this troffer, please visit
trendlighting.com.au/product/troffer-ZAR30

Trim Colour



W
White Trim

Emergency Kits *

EMB
Emergency Kit with Maintained Backup

- Illuminated all the time for safety but has the capacity to be switched on and off
- Continues to illuminate at a lower-level in the event of loss of power using its battery backup supply

ENB
Emergency Kit with Non-maintained Backup

- Only illuminates in the event of a loss of power
- When power fails, the fixture switches on using its battery backup supply