



Scan to explore  
ZBB44 online


# Diffused Batten ZBB44

30W Surface Mounted Diffused Batten

Product Code	Colour Temperature	Colour Technology	Beam Angle	Trim Colour	Driver	Emergency Kit*
<b>ZBB44</b>	2.7 (2700K)	(CRI 90+ Standard)	VW (Very Wide)	W (White)	ND (Non-dimmable) DALI (DALI) 110V (1-10V)	EMB (Maintained Backup)
	3 (3000K)					ENB (Non-maintained Backup)
	4 (4000K)					
	5 (5000K)					

Order Code **ZBB444-VW-W-ND**

\* Optional emergency kit

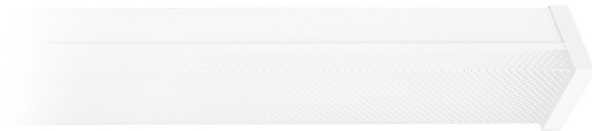

## Product Features


- Surface mounted diffused LED batten with powder coated body and acrylic prismatic diffuser for smooth uniform light distribution
- Optional battery backup kit available in maintained or non-maintained variants, meeting AS/NZS 2293 compliance
- CRI 90+ available in 2700K, 3000K, 4000K and 5000K CCT options
- Supplied with an integral driver and internally mounted 4mm<sup>2</sup> terminal block for easy installation

To configure this batten, please visit  
[trendlighting.com.au/product/diffused-batten-ZBB44](http://trendlighting.com.au/product/diffused-batten-ZBB44)

## Physical Characteristics

Trim Colour	White
Dimensions (LxWxH)	1195 x 95 x 83 mm
Weight	3.2 kg

## Dimensions (mm)

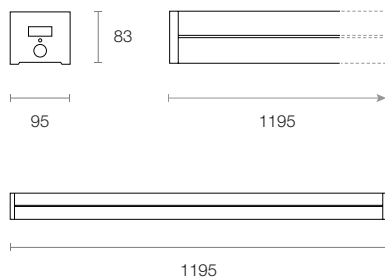

## Product Attributes



## Technical Characteristics

Based on ZBB444-VW-W-ND

LED Power	30W
LED Type	SMD
Lumen Output	4464 lm
Luminous Flux	3120 lm
Efficacy	97.50 lm/W
Colour Temperature	2700K   3000K   4000K   5000K
Colour Technology	CRI 90+
Colour Deviation	SDCM ≤ 3
Lifetime	50,000 hours (L80 B10)
Beam Angle	Very Wide
System Power	32W Typical
Driver Model	Trend 150232 (Non-dim)
Input	220-240V AC 50/60 Hz
Output	24V DC 2.08A
Power Factor	>0.93
Protection	OVP, OTP, OCP, SCP, OPP
Dimming	Non-dimmable   DALI   1-10V

## General Characteristics

Category	Linears & Battens
Family	Diffused Batten
Surface	Ceiling
Mounting	Surface Mounted
Ingress Protection	IP20



Scan to explore  
ZBB44 online

# Diffused Batten ZBB44

30W Surface Mounted Diffused Batten

Product Code	Colour Temperature	Colour Technology	Beam Angle	Trim Colour	Driver	Emergency Kit *
<b>ZBB44</b>	2.7 (2700K)	(CRI 90+ Standard)	VW (Very Wide)	W (White)	ND (Non-dimmable) DALI (DALI) 110V (1-10V)	EMB (Maintained Backup)
	3 (3000K)					ENB (Non-maintained Backup)
	4 (4000K)					
	5 (5000K)					

Order Code **ZBB444-VW-W-ND**

\* Optional emergency kit

To configure this batten, please visit  
[trendlighting.com.au/product/diffused-batten-ZBB44](http://trendlighting.com.au/product/diffused-batten-ZBB44)

## Trim Colour



W  
**White Trim**

## Emergency Kits \*

### EMB Emergency Kit with Maintained Backup

- Illuminated all the time for safety but has the capacity to be switched on and off
- Continues to illuminate at a lower-level in the event of loss of power using its battery backup supply

### ENB Emergency Kit with Non-maintained Backup

- Only illuminates in the event of a loss of power
- When power fails, the fixture switches on using its battery backup supply