

**8** Ensure the installation surface is thoroughly cleaned and free from dust, debris, or any other contaminants. A clean surface is crucial for proper adhesion and optimal performance.

**9** Place the LED strip on a smooth, clean, and non-porous surface with minimal vibration for best results.



**Wiring Diagrams**

**10a** The recommended maximum length per strip is 5 metres, depending on the driver rating.

**10b** The recommended maximum length per strip is 5 metres, depending on the driver rating.

V1-05.12.2024 Product designs and technical data may be subject to change.

# Flexiled XF24120 Flexible Strip Installation Guide

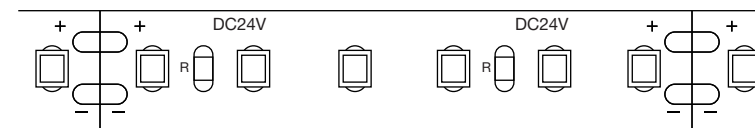

For warranty information, please visit [trendlighting.com.au/warranty](http://trendlighting.com.au/warranty)

When handling this product, care must be taken to avoid damaging the LED strip, as damage caused by improper handling is not covered under warranty.

### Important Safety Information

Please read these installation instructions carefully before installing this luminaire.

- Installation and maintenance of this product must be carried out by an individual with the necessary skills, in compliance with the latest regulations and relevant legislation.
- Isolate the mains power supply prior to installation.
- Only reconnect mains power after installation is completed.
- This product is not user serviceable.

### Approvals & Notes

The RCM marking of this product applies to AS/NZS 4417.1 "Regulatory compliance mark (RCM) for electrical and electronic equipment". This product is designed to conform to AS/NZS 60598 "Luminaires, general requirements and tests".



Product Code	Dimensions	Maximum Length
XF24120	1000 (L) X 11.5 (W) X 2 (H) mm	5 metres *

\* Custom length is available up to 5 metres.

For applicable extrusions, please refer to the **XF24120 datasheet**.

