



Scan to explore
XMB125 online

Midiled XMB125

25W Recessed Adjustable Square Downlight

Product Code	Colour Temperature	Colour Technology	Beam Angle	Trim Colour	Driver
XMB125	2.7 (2700K)	(CRI 90+ Standard)	NB (Narrow)	W (White)	ND (Non-dimmable)
	3 (3000K)	V (CRI 93+ VIVID)	MB (Medium)	B (Black)	LT (Leading & Trailing Edge)
	3.5 (3500K)	R (CRI 97+ Standard)	WB (Wide)	S (Silver)	DALI (DALI)
	4 (4000K)				

Order Code **XMB1254-WB-W-ND**



Product Features

- Single recessed adjustable LED downlight with square trim
- Also available in a twin configuration ([XMB225](#)) or as a row of three ([XMB325](#))
- Anodised black heatsink for optimum thermal management, ensuring high output and long lifespan
- CRI 90+ available in 2700K, 3000K, 3500K and 4000K CCT options; CRI 93+ VIVID and CRI 97+ available in 2700K, 3000K and 4000K CCT options
- Supplied with a remote driver

Product Attributes




To configure this downlight, please visit
trendlighting.com.au/product/midiled-XMB125

Physical Characteristics

Trim Colour	White Black Silver
Tilt Angle	35° x 35°
Dimensions (LxWxH)	190 x 190 x 185 mm
Spring Height	22 mm
Cutout	Square 165 x 165 mm
Weight	1895 g

Dimensions (mm)

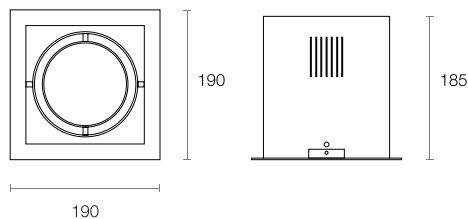

 Cutout 165 x 165 mm

Technical Characteristics

Based on XMB1254-WB-W-ND

LED Power	25W
LED Type	COB
Lumen Output	2955 lm
Luminous Flux	2441 lm
Efficacy	92.46 lm/W
Colour Temperature	2700K 3000K 3500K 4000K
Colour Technology	CRI 90+ CRI 93+ VIVID CRI 97+
Colour Deviation	SDCM ≤ 2
Lifetime	50,000 hours (L80)
Beam Angle	Narrow Medium Wide

System Power	26.4W Typical
Driver Model	Trend 150020-B-700 (Non-dim)
Input	180-265V AC 50/60 Hz
Output	30-40V DC 700mA
Power Factor	>0.90
Protection	OVP, OTP, OCP, SCP, OPP
Dimming	Non-dimmable Leading & Trailing Edge DALI

General Characteristics

Category	Downlights
Family	Midiled
Surface	Ceiling
Mounting	Recessed
Insulation Contact	Non-IC
Ingress Protection	IP20



Scan to explore
XMB125 online

Midiled XMB125

25W Recessed Adjustable Square Downlight

Product Code	Colour Temperature	Colour Technology	Beam Angle	Trim Colour	Driver
XMB125	2.7 (2700K)	(CRI 90+ Standard)	NB (Narrow)	W (White)	ND (Non-dimmable)
	3 (3000K)	V (CRI 93+ VIVID)	MB (Medium)	B (Black)	LT (Leading & Trailing Edge)
	3.5 (3500K)	R (CRI 97+ Standard)	WB (Wide)	S (Silver)	DALI (DALI)
	4 (4000K)				

Order Code **XMB1254-WB-W-ND**

To configure this downlight, please visit
trendlighting.com.au/product/midiled-XMB125

Trim Colour



W
White Trim



B
Black Trim



S
Silver Trim