



Scan to explore
ZPL40 online


Panel ZPL40

37W Recessed Rectangular Panel Light

Product Code	Colour Temperature	Colour Technology	Beam Angle	Trim Colour	Accessories *	Driver
ZPL40	3 (3000K)	(CRI 80+ Standard)	UW (Ultra Wide)	W (White)	PR (Plaster Recessing Kit) SM (Surface Mounting Kit) SP (Suspension Kit)	ND (Non-dimmable)
	4 (4000K)					DALI (DALI)

Order Code **ZPL404-UW-W-ND**

* Optional accessories

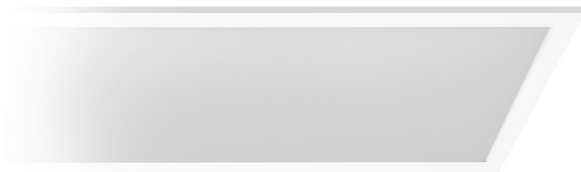

Product Features

- Rectangular LED panel light known for its thin profile and high performance
- Designed with powder coated extruded aluminium frame with low glare and high transparency microprismatic diffuser
- Can be configured with different mounting kits - suspended, surface mounted and plaster recessed
- Suitable for mounting in metric T-Bar ceiling applications
- CRI 80+ available in 3000K and 4000K options
- Supplied with a remote driver for easy installation

Product Attributes




To configure this panel, please visit
trendlighting.com.au/product/panel-ZPL40

Physical Characteristics

Trim Colour	White
Dimensions (LxWxH)	1195 x 295 x 12 mm
Weight	2.55 kg

Dimensions (mm)

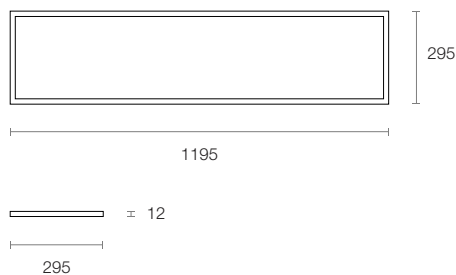

Technical Characteristics

Based on ZPL404-UW-W-ND

LED Power	37W
LED Type	SMD
Lumen Output	5600 lm
Luminous Flux	4435 lm
Efficacy	108.70 lm/W
Colour Temperature	3000K 4000K
Colour Technology	CRI 80+
Colour Deviation	SDCM ≤ 2
Lifetime	50,000 hours (L80 B10)
Beam Angle	Ultra Wide

System Power	40.8W Typical
Driver Model	Trend 150027-1000 (Non-dim)
Input	220-240V AC 50/60 Hz
Output	30-42V DC 1000mA
Power Factor	>0.93
Protection	OVP, OTP, OCP, SCP, OPP
Dimming	Non-dimmable DALI

General Characteristics

Category	Panels & Troffers
Family	Panel
Surface	Ceiling
Mounting	Recessed Surface Mounted Suspended
Insulation Contact	Non-IC
Ingress Protection	IP40



Scan to explore
ZPL40 online

Panel ZPL40

37W Recessed Rectangular Panel Light

Product Code	Colour Temperature	Colour Technology	Beam Angle	Trim Colour	Accessories *	Driver
ZPL40	3 (3000K)	(CRI 80+ Standard)	UW (Ultra Wide)	W (White)	PR (Plaster Recessing Kit) SM (Surface Mounting Kit) SP (Suspension Kit)	ND (Non-dimmable)
	4 (4000K)					DALI (DALI)

Order Code **ZPL404-UW-W-ND**

* Optional accessories

To configure this panel, please visit
trendlighting.com.au/product/panel-ZPL40

Trim Colour



W
White Trim


Accessories *



PR
Plaster Recessing Kit



SM
Surface Mounting Kit

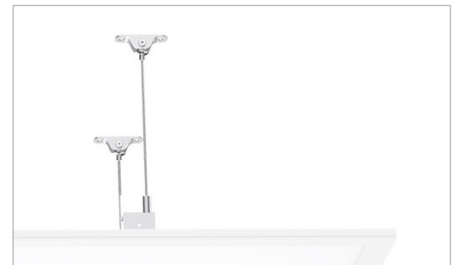

SP
Suspension Kit