




MEGALED XLA60


60 Watts / 5800 Lumens / 90+ CRI

60 LED downlight featuring large diameter and cut-out ideal for use in place of existing CFL downlights. Available in 3000K, 4000K and 5000K colour temperature options with a high CRI of 90+ and a high COB lumen output. Black anodized pressure cast aluminium heatsink provides effective thermal management ensuring high output and long lifespan.

XLA60 Dimensions

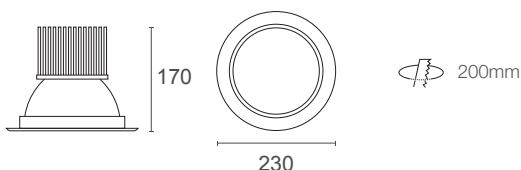

XLA60 Trim Colours

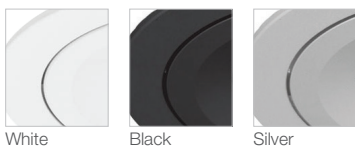


Input Voltage	240V	IP Rating	IP20
System Power	63.1W	Cut-Out	200mm
LED Power	60W	Weight	1300g
Lamp Type	LED		

XLA60 Technical Specifications

	3000K	4000K	5000K
COB Lumen Output	5600 lm	5800 lm	6100 lm
Total Luminous Flux	4480 WB	4640 WB	4880 WB
Efficacy	99 lm/W	Wide Beam	
Lifetime	50,000hrs (L70)		
Power Factor	> 0.95		
Input Voltage	100V - 240V AC 50/60 Hz		
Protection	Thermal and Short Circuit		
Dimming	DALI*	1-10v*	Available on request

XLA60 Order Code

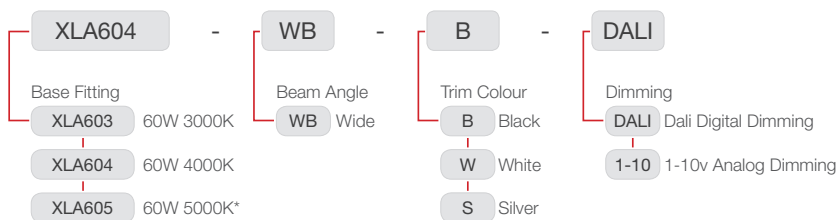

* Special Order



TREND
LIGHT BY SOLID STATE

Level 3, 290-292 Coward Street, Mascot, NSW, 2020
Ph: (02) 9669 8888 Fax: (02) 9669 8899 Email: sales@trendlighting.com.au