TREND
LIGHT BY SOLID STATE

Linear XTW25
17W Surface Mounted Wall Washer

Product Code	Colour Temperature	Colour Technology	Beam Angle	Trim Colour	Driver
XTW25	2.7 (2700K)	(CRI 90+ Standard)	VW (Very Wide)	W (White)	ND (Non-dimmable)
	3 (3000K)			B (Black)	DALI (DALI)
	4 (4000K)				110V (1-10V)
	5 (5000K)				

Order Code **XTW254-VW-B-ND**

Product Features

- Surface mounted adjustable LED linear known for its versatility in illuminating vertical features and surfaces
- Manufactured from extruded aluminium with powdercoat finish and opaque acrylic diffuser for smooth beam distribution
- Designed with adjustable mounting brackets, providing 355° tilt with flexible mounting options
- CRI 90+ available in 2700K, 3000K, 4000K and 5000K CCT options
- Supplied with integral control gear with flex & plug
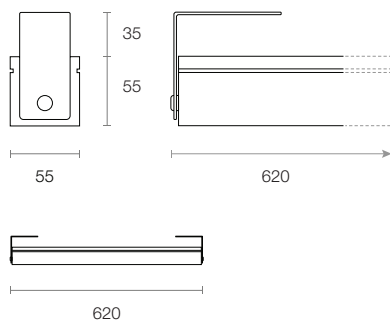- Custom lengths and driver options are available on request

To configure this linear light, please visit
trendlighting.com.au/product/linear-XTW25

Product Attributes

LED COB | CRI 90+ | IP20 | NON DIM

Physical Characteristics

Trim Colour	White | Black
Dimensions (LxWxH)	620 x 55 x 90 mm
Tilt Angle	355°
Weight	1206 g

Dimensions (mm)

35
55
55
620
620

Technical Characteristics

Based on XTW254-VW-B-ND

LED Power	17W
LED Type	COB
Lumen Output	2232 lm
Luminous Flux	1070 lm
Efficacy	56.32 lm/W
Colour Temperature	2700K | 3000K | 4000K | 5000K
Colour Technology	CRI 90+
Colour Deviation	SDCM ≤ 3
Lifetime	50,000 hours (L70)
Beam Angle	Very Wide

System Power	19W Typical
Driver Model	Trend 150232 (Non-dim)
Input	220-240V AC 50/60 Hz
Output	24V DC 2.08A
Power Factor	>0.93
Protection	OVP, OTP, OCP, SCP, OPP
Dimming	Non-dimmable | DALI | 1-10V

General Characteristics

Category	Linears & Battens, Wall Washers
Family	Linear
Surface	Ceiling, Wall
Mounting	Surface Mounted
Ingress Protection	IP20

TREND
LIGHT BY SOLID STATE

Linear XTW25
17W Surface Mounted Wall Washer

Product Code	Colour Temperature	Colour Technology	Beam Angle	Trim Colour	Driver
XTW25	2.7 (2700K)	(CRI 90+ Standard)	VW (Very Wide)	W (White)	ND (Non-dimmable)
	3 (3000K)			B (Black)	DALI (DALI)
	4 (4000K)				110V (1-10V)
	5 (5000K)				

Order Code **XTW254-VW-B-ND**

To configure this linear light, please visit
trendlighting.com.au/product/linear-XTW25

Trim Colour

W
White Trim

B
Black Trim