



Scan to explore
XDS25 online

Midiled XDS25

25W Recessed Downlight

Product Code	Colour Temperature	Colour Technology	Beam Angle	Trim Colour	Driver
XDS25	2.7 (2700K)	(CRI 90+ Standard)	NB (Narrow)	W (White)	LT (Leading & Trailing Edge)
	3 (3000K)	V (CRI 93+ VIVID)	MB (Medium)	B (Black)	DALI (DALI)
	3.5 (3500K)	R (CRI 97+ Standard)	WB (Wide)	S (Silver)	
	4 (4000K)				

Order Code **XDS254-WB-W-LT**




To configure this downlight, please visit
trendlighting.com.au/product/midiled-XDS25

Physical Characteristics

Trim Colour	White Black Silver
Dimensions	Ø130 x 110 (H) mm
Spring Height	22 mm
Cutout	Circular 115 mm
Weight	370 g

Dimensions (mm)

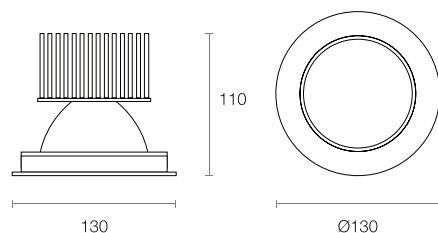

 Cutout Ø115 mm

Product Features

- Recessed LED downlight characterised by its quality, light efficiency and performance
- Manufactured with an aluminium body and powder coat finish
- Large pin fin heatsink for optimal thermal management
- Also available in other configurations ([XDS10](#), [XDS15](#) and [XDS35](#))
- CRI 90+ available in 2700K, 3000K, 3500K and 4000K CCT options; CRI 93+ VIVID and CRI 97+ available in 2700K, 3000K and 4000K CCT options
- Supplied with a remote driver

Product Attributes



Technical Characteristics

Based on XDS254-WB-W-LT

LED Power	25W
LED Type	COB
Lumen Output	2955 lm
Luminous Flux	2437 lm
Efficacy	92.31 lm/W
Colour Temperature	2700K 3000K 3500K 4000K
Colour Technology	CRI 90+ CRI 93+ VIVID CRI 97+
Colour Deviation	SDCM ≤ 2
Lifetime	50,000 hours (L80)
Beam Angle	Narrow Medium Wide
System Power	26.4W Typical
Driver Model	Trend 150020-700 (L&T)
Input	180-265V AC 50/60 Hz
Output	30-40V DC 700mA
Power Factor	>0.90
Protection	OVP, OTP, OCP, SCP, OPP
Dimming	Leading & Trailing Edge DALI

General Characteristics

Category	Downlights
Family	Midiled
Surface	Ceiling
Mounting	Recessed
Insulation Contact	Non-IC
Ingress Protection	IP44



Scan to explore
XDS25 online

Midiled XDS25

25W Recessed Downlight

Product Code	Colour Temperature	Colour Technology	Beam Angle	Trim Colour	Driver
XDS25	2.7 (2700K)	(CRI 90+ Standard)	NB (Narrow)	W (White)	LT (Leading & Trailing Edge)
	3 (3000K)	V (CRI 93+ VIVID)	MB (Medium)	B (Black)	DALI (DALI)
	3.5 (3500K)	R (CRI 97+ Standard)	WB (Wide)	S (Silver)	
	4 (4000K)				

Order Code **XDS254-WB-W-LT**

To configure this downlight, please visit
trendlighting.com.au/product/midiled-XDS25

Trim Colour



W
White Trim



B
Black Trim



S
Silver Trim